# 1/16 (1.5mm) TEE SPACER

# To be used in conjunction with levolution tile leveling and spacing system.

The Tee spacers are used where the tiles are laid in a brick style pattern (Fig 4)

The top view of the spacer (Fig 3) shows the holes in the base of the spacer that allows adhesives to flow through to prevent voids in the corners and give maximun coverage and grip. The spacer has also been designed to snap off cleanly at the base so the spacer can be fully removed after adhesive has set.


See website for installation videos.



1/16in (1.5mm) Fig 1

#### Maximun tile thickness that can be used

5/8in (16mm) Fig 2






### Coverage


See table below


## **Packaging**

Bags of 50 units





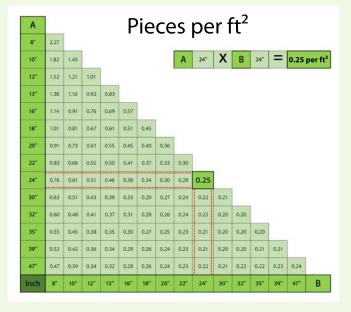

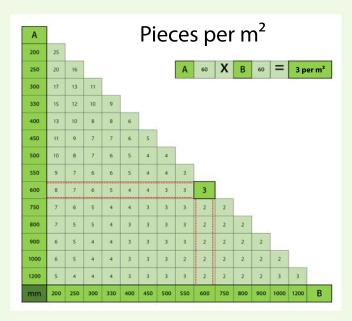

Tables are used as a guide for estimating the amount of pieces needed